

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT CO-OPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/005084 A1(51) International Patent Classification⁷: B60R 21/20,
B62D 1/04(21) International Application Number:
PCT/SE2003/000910

(22) International Filing Date: 4 June 2003 (04.06.2003)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
0215279.1 2 July 2002 (02.07.2002) GB(71) Applicant (for all designated States except US): AUTO-
LIV DEVELOPMENT AB [SE/SE]; S-477 83 Vårgårda
(SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CHAPELAIN,
Etienne [FR/FR]; 48 bis, rue Joseph Zamanski, F-86440
Migné-Auxances (FR). MATRAT, Thierry [FR/FR];3, rue du Moulin, Traversonne, F-86190 Vouille (FR).
DREES, Holger [DE/DE]; August Macke Weg 4, 81477
München (DE). PILLGRUBER, Robert [DE/DE];
Kellerstrasse 3b, 85283 Wolnzach (DE). MAIA, Americo
[FR/FR]; 4, Villa les Gres, F-95800 Courdimanche (FR).
HELLOT, Laurent [FR/FR]; 13, place Verte, 76220
La Feuillie (FR). YAGAMI, Satoshi [JP/JP]; 409-13,
Yamagiwa Atsugi-shi, Kanagawa 243-0803 (JP). FU-
JITA, Kelichiro [JP/JP]; 409-13, Yamagiwa Atsugi-shi,
Kanagawa 243-0803 (JP). MINAGAWA, Koichi [JP/JP];
8-7-29, Higashirinkan Sagami-hara-shi, Kanagawa,
228-0811 (JP).(74) Agent: MEULLER, Erik; Autoliv Development AB,
S-447 83 Vårgårda (SE).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL,
TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

[Continued on next page]

(54) Title: A STEERING WHEEL

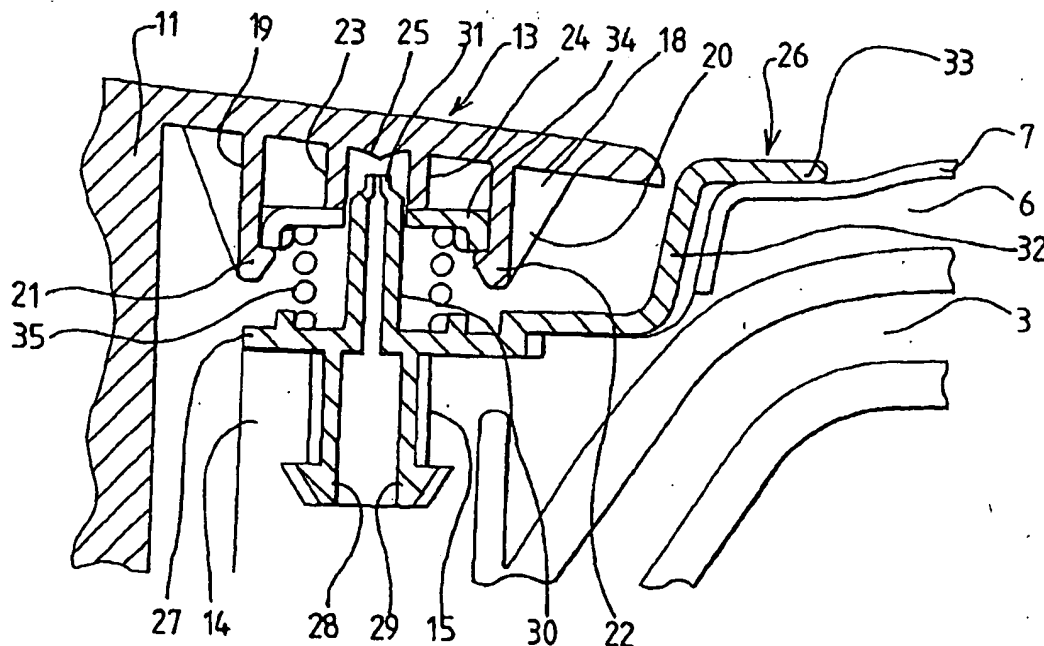

(57) Abstract: A steering wheel is disclosed, the steering wheel comprising a frame as radially outwardly-extending spokes (3, 4) and a rim (5). The frame defines a recess to receive an air-bag unit (9). The steering wheel is provided with a number of mounting elements (26) associated with a respective spoke (3, 4). Each mounting element (26) is connected to the steering wheel and has a portion (33) overlying part of the steering wheel. The air-bag unit (9) is connected to each mounting element (26) by means of a resiliently-biased connection to permit relative movement of the air-bag unit (9) with respect to the steering wheel, such that the peripheral part of the air-bag unit (9) defines a pre-determined gap between itself and the overlying portion (33) of the mounting element (26).